


PLAN VIEW

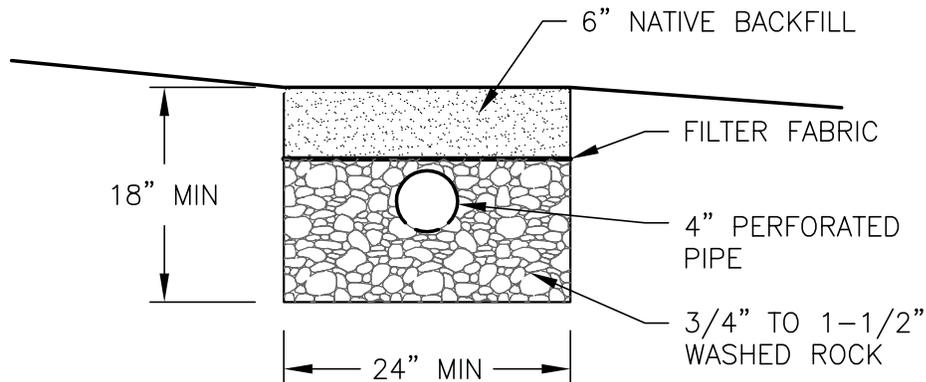


TRENCH SECTION

CONSTRUCTION NOTES:

1. ROOF DRAIN SHALL PROVIDE POSITIVE FLOW FROM DOWNSPOUTS TO YARD DRAIN.
2. A YARD DRAIN SHALL BE INSTALLED UPSTREAM OF THE INFILTRATION TRENCH.
3. INFILTRATION TRENCH SHALL BE LOCATED OUTSIDE OF ALL UTILITY EASEMENTS.
4. INFILTRATION TRENCH SHALL NOT BE INSTALLED UNDER IMPERVIOUS SURFACES.



City of Covington
Public Works
Community Development



PERFORATED TIGHTLINE CONNECTION

This document has been signed electronically in accordance with WAC 196-23-070 and Chapter 19.34 RCW. Unauthorized alteration of any of the information on this document will invalidate the document, my certification and signature.

102

Revision Date
July 2009