


PLAN

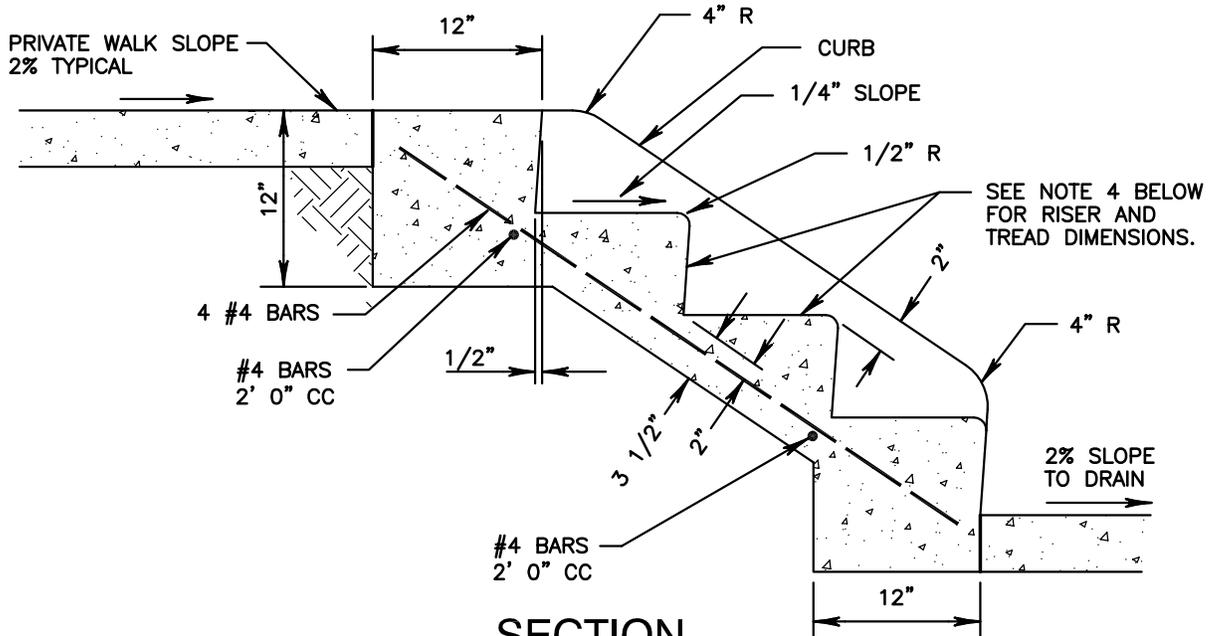


SECTION

NOTES :

- 1 STEPS SHALL BE 4'-0" WIDE (MIN), CURB TO CURB, PLUS 6" CURBS ON EACH SIDE.
- 2 CEMENT CONCRETE SHALL BE CLASS 4000, TROWEL FINISH.
- 3 NUMBER OF STEPS SHALL SUIT INDIVIDUAL CONDITIONS, WITH TREAD AND RISER DIMENSIONS TO SUIT THE GRADE.
- 4 RISER SHALL BE 5" MIN. 7" MAX., TREAD SHALL BE 11" MIN. 12" MAX.
- 5 ALL STEPS SHALL HAVE RAILINGS (BOTH SIDES) INSTALLED PER STD'S 316 AND 317.



City of Covington
Public Works
Community Development



CEMENT CONCRETE STEPS

This document has been signed electronically in accordance with WAC 196-23-070 and Chapter 19.34 RCW. Unauthorized alteration of any of the information on this document will invalidate the document, my certification and signature.

319

Revision Date
July 2009