



FRAME CAST INTO
PRECAST ADJUSTMENT
SECTION


FLANGE
UPWARD

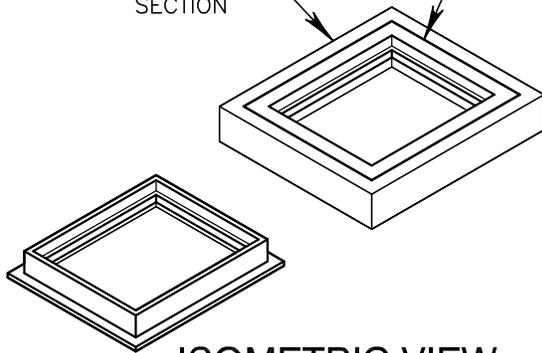

ISOMETRIC VIEW

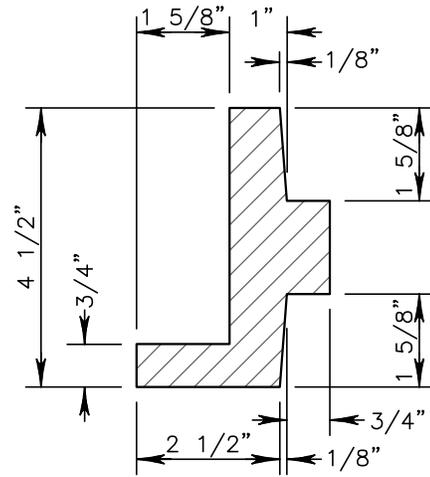

SECTION A-A

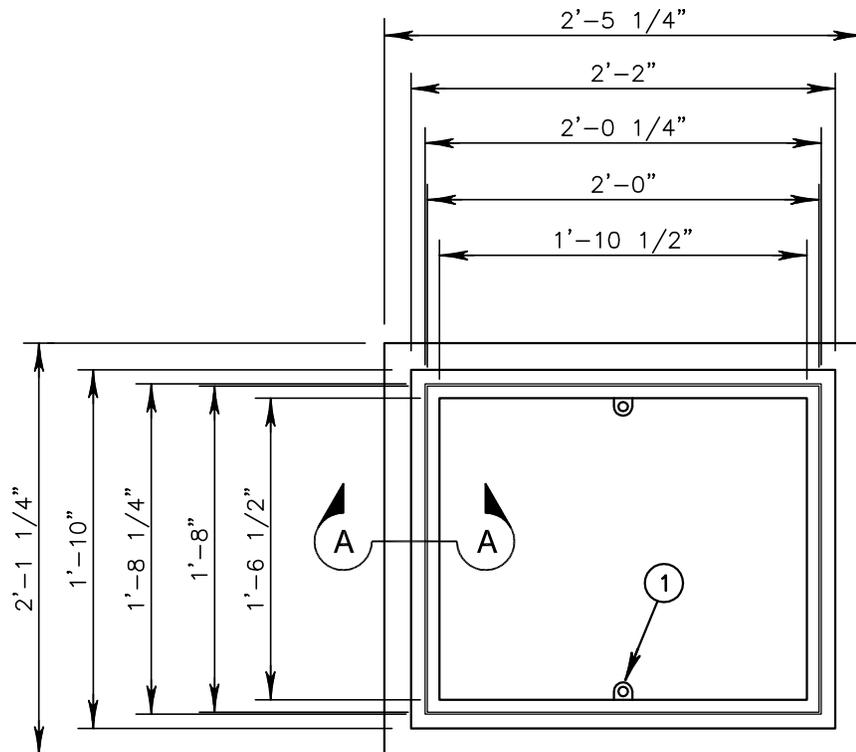

PLAN VIEW

DETAIL NOTES

Frame is designed to accommodate 20" x 24" grates or covers, as shown in Standard Details 724, 725 and 726.

Frame shall be gray iron, conforming to ASTM A48-90, Grade 30.


- ① ALL STORM DRAIN GRATES AND COVERS SHALL BE LOCKING. THREADED HOLES SHALL BE PROVIDED IN THE CASTING TO ALLOW FOR TWO 5/8" DIA STAINLESS ALLEN HEAD CAP SCREWS.



City of Covington

Public Works

Community Development



RECTANGULAR
INLET FRAME

722

This document has been signed electronically in accordance with WAC 196-23-070 and Chapter 19.34 RCW. Unauthorized alteration of any of the information on this document will invalidate the document, my certification and signature.

Revision Date
October 2009