


PLAN VIEW

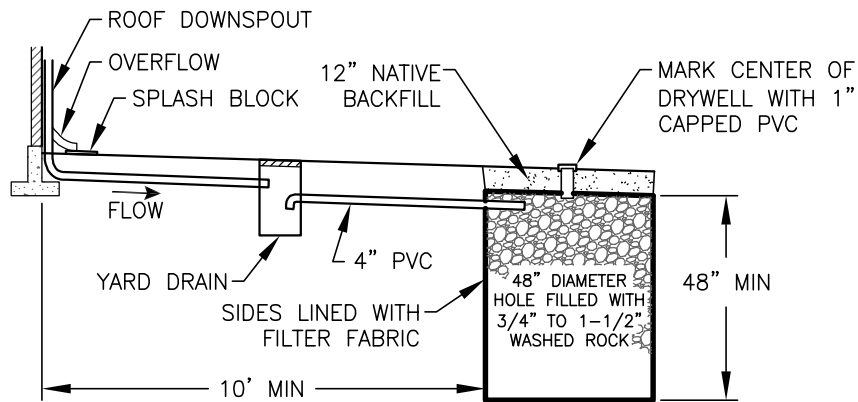


DRYWELL PROFILE

CONSTRUCTION NOTES:

1. ROOF DRAIN SHALL PROVIDE POSITIVE FLOW FROM DOWNSPOUTS TO YARD DRAINS.
2. YARD DRAINS SHALL BE INSTALLED UPSTREAM OF EACH ROOF DRAIN DRYWELL.
3. DRYWELL BOTTOM SHALL BE A MINIMUM OF 1' ABOVE SEASONAL HIGH GROUNDWATER OR IMPERMEABLE SOIL LAYER.
4. EACH DRYWELL MAY SERVE UP TO 1000 S.F. OF ROOF AREA IN MEDIUM TO COARSE SANDS.



City of Covington
Public Works
Community Development



ROOF DRAIN DRYWELL

This document has been signed electronically in accordance with WAC 196-23-070 and Chapter 19.34 RCW. Unauthorized alteration of any of the information on this document will invalidate the document, my certification and signature.

103

Revision Date
July 2009